

**GO Smart Wi-Fi**

# Home Wi-Fi in every corner. Guaranteed.

Setup Guide

Using your GO Smart Wi-Fi Beacon with a  
standard GO modem\*



\*Sagemcom F@st 5370 Air  
Technicolor TG789VAC V2 / DGA0122

**GO** better  
every  
day

# What's included in the box

GO Smart Wi-Fi Beacon



Ethernet Cable



Power Supply




# Your GO Smart Wi-Fi Beacon's LED Indicator status list

LED Colour	LED Behaviour	What it means
Off	Off	No power
White	Solid	Booting up
Blue-Green (or Blue)	Solid	Connection is good
Yellow	Solid	Connection is poor
Red	Solid	Connection is bad or not connected
Yellow	Slow pulse	Configuration mode
White	Slow pulse	Backhaul link setting up or WPS mode enabled
White	Fast pulse (3 secs)	Backhaul link established
Red	Fast pulse	Factory reset has been triggered



# Adding GO Smart Wi-Fi Beacons to your Home Network for a standard GO modem

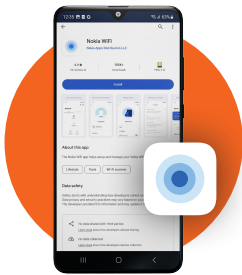

**STEP 1:** Ensure you have an internet connection on your phone and **download** the **Nokia WIFI** app from **Google Play Store** or **Apple App Store**.



**STEP 2:** Now turn off the Wi-Fi on your GO modem. Refer to the **Switch off Wi-Fi** section on **page 10** to see the steps for your particular modem type.



**STEP 3:** Unbox the first GO Smart Wi-Fi Beacon and use the supplied Ethernet cable to connect one end to the **blue WAN port on the Beacon**, and the other end to any of the **yellow ports 1-3** on the modem.




**Only one Beacon is to be connected via Ethernet cable to the modem.**




**STEP 4:** Plug the **GO Smart Wi-Fi Beacon** in a power socket, close to the modem, and **slide the power button** on the bottom of the Beacon to **ON**.




**STEP 5:** Wait for the **LED** on the **GO Smart Wi-Fi Beacon** to become a **steady blue** after it stops flashing white/yellow.



**STEP 6:** Now, connect to the Wi-Fi from your **GO Smart Wi-Fi Beacon** by **scanning the QR code**.

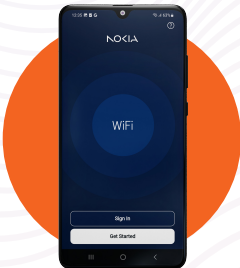

**STEP 7:** Open the **Nokia WiFi app** and enter the username [**advanceduser**] and **password** found on the **bottom of your GO Smart Wi-Fi Beacon**, then press **Sign In**.

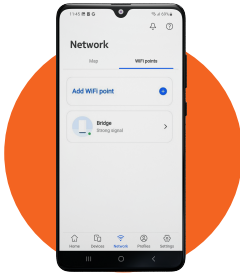


**STEP 8:** To add the second **GO Smart Wi-Fi Beacon** to your network, go to the **Network tab**, choose **WiFi points** and tap on **Add WiFi Point**.



**At least two Beacons are required to form a mesh network.**




**STEP 9:** **Unbox your other GO Smart Wi-Fi Beacon** and before powering it on, on your mobile phone, **tap on Scan code** to utilise the QR scanner to capture the code located under your Beacon.

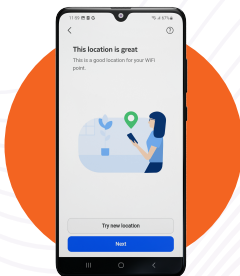


**STEP 10:** **Connect your GO Smart Wi-Fi Beacon to Wi-Fi** by tapping on **Next** and follow the **app instructions** to find the **optimal location** for your Beacon.



**STEP 11:** Once the app prompts the best location, plug in your **GO Smart Wi-Fi Beacon** to the nearest power outlet. Switch the Beacon on by **sliding the power button to ON**. The **LED on the Beacon will light up white**.

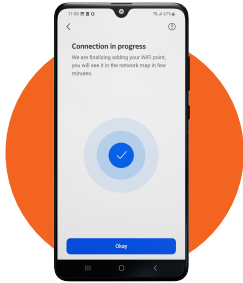

**STEP 12:** The **GO Smart Wi-Fi Beacon** will appear as **Connection in progress**.



**STEP 13:** The **GO Smart Wi-Fi Beacon** setup is **complete** when it's visible in the **Network Map** on the **Network tab**.




To **add more GO Smart Wi-Fi Beacons** to your network, you need to **repeat Step 8 to Step 13**.




**You can also connect Beacons with Ethernet instead of via Wi-Fi.**

In this case, the **Ethernet cable** is to be connected from the **yellow LAN port** on any **Beacon**, to the **blue WAN port** on the **next Beacon**.

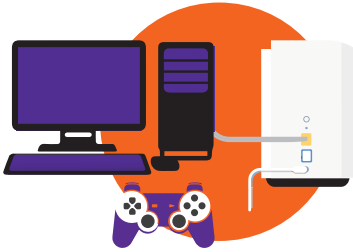

For wired devices, you can connect them directly to the **GO Smart Wi-Fi Beacons** using an **Ethernet cable** by plugging them into the **yellow LAN port**.

## Factory Reset




If you run into issues during setup, a **factory reset** might be required. To do this, using a **paper clip**, hold down the **RESET button** found at the **back of the Beacons**, until the front **light starts flashing red** (this will take approximately **12 seconds**).



# Possible Setups

## Setup 1

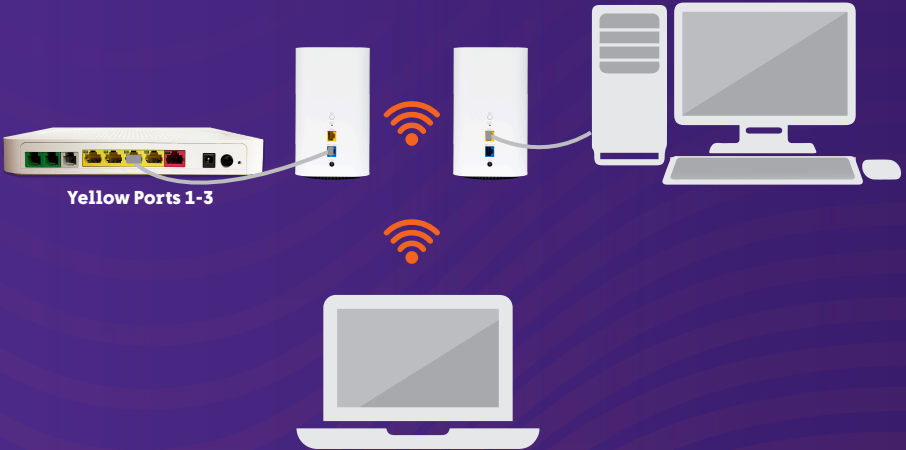

## Setup 2



# Switch OFF the Wi-Fi on a standard GO modem



## Smart Hub

**Wi-Fi button can be located on the left side of the modem.** Wireless LED indicator should turn off when this is disabled.



## Technicolor TG789VAC V2/ DGA0122

**Wi-Fi button located on top, to the right of the LED indicators.** Wireless LED indicator should turn off when this is disabled.

## Need help?

Get in touch with us on

 WhatsApp on **+356 7970 7970**

 FB Messenger **m.me/go.com.mt**

 Live Chat at **www.go.com.mt**